


SAW FILTER

Part Number: VTF12206

The **VTF12206** is a low-loss, compact, and economical surface-acoustic-wave (**SAW**) RF filter in a surface-mount ceramic **QCC8B** case for digital set top box.

1. Package Dimension (QCC8B)

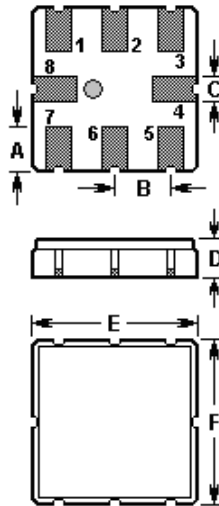

Pin	Configuration
1, 2	Input
5, 6	Output
3, 7	To be grounded
4, 8	Case Ground

Sign	Data (unit: mm)	Sign	Data (unit: mm)
A	1.00	D	1.50
B	1.27	E	3.80
C	0.60	F	3.80

2. Marking

VTF


12206

Laser Marking

3. Matching Circuit

No matching network required
for operation at 200Ω

4. Typical Frequency Response

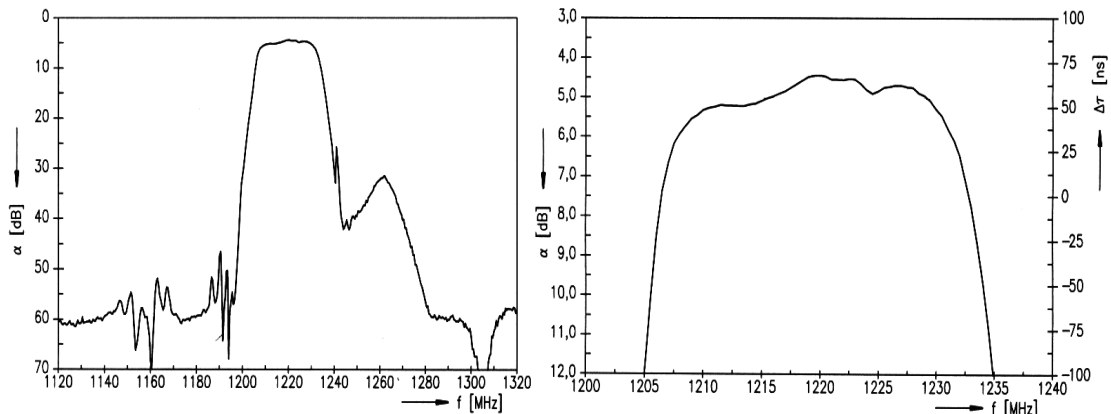

5. Performance

5-1. Maximum ratings

Rating		Value	Unit
Input Power Level	P	0	dBm
DC Voltage	V_{DC}	0	V
Storage Temperature Range	T_{stg}	-40 to +85	°C
Operable Temperature Range	T_A	-40 to +85	°C

5-2. Electronic characteristics

Operating temperature range: $T = -40^{\circ}\text{C} \dots +85^{\circ}\text{C}$
Terminating source impedance: $Z_S = 200\Omega$
Terminating load impedance: $Z_L = 200\Omega$

Characteristic		Min.	Typ.	Max.	Unit
Center Frequency	f_C		1220.0		MHz
Maximum insertion Loss ($\pm 4\text{MHz}$)	IL_{max}	3.5	4.7	5.8	dB
Ripple in passband ($\pm 4\text{MHz}$)	$\Delta\alpha$		0.8	1.5	dB
Attenuation	α				dB
500.00 $f_C - 91.00$ MHz		50.0	60.0		
$f_C - 91.00$ $f_C - 85.00$ MHz		50.0	60.0		
$f_C - 76.00$ $f_C - 68.00$ MHz		46.0	55.0		
$f_C - 88.00$ MHz		50.0	60.0		
$f_C - 72.00$ MHz		48.0	58.0		
$f_C - 44.00$ MHz		50.0	60.0		
$f_C - 36.00$ MHz		46.0	52.0		
$f_C + 70.00$ 2000.00 MHz		50.0	55.0		
Group delay ripple	$\Delta\tau$				ns
Aperture 500 kHz	1216.00 1224.00 MHz		15		

5-3. Electronic characteristics

Operating temperature range: $T = 20^{\circ}\text{C} \dots 70^{\circ}\text{C}$
Terminating source impedance: $Z_S = 200\Omega$
Terminating load impedance: $Z_L = 200\Omega$

Characteristic	Min.	Typ.	Max.	Unit
Center frequency f_C		1220.0		MHz
Minimum Insertion Loss 1210.00 1229.00 MHz IL_{min}	3.5	4.5	5.8	dB
Ripple in passband 1210.00 1229.00 MHz $\Delta\alpha$		1.0	3.0	dB
Relative attenuation (relative to IL_{min}) α_{rel}				
500.00 $f_C-91.00$ MHz	46.0	56.0		
$f_C-91.00$ $f_C-85.00$ MHz	46.0	56.0		
$f_C-76.00$ $f_C-68.00$ MHz	42.0	51.0		
$f_C-88.00$ MHz	46.0	56.0		dB
$f_C-72.00$ MHz	44.0	54.0		
$f_C-44.00$ MHz	46.0	56.0		
$f_C-36.00$ MHz	42.0	48.0		
$f_C +70.00$ 2000.00 MHz	46.0	51.0		
Group delay ripple Aperture 500 kHz $\Delta\tau$ 1210.00 1229.00 MHz		40		ns

ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

1. The frequency f_C is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with VSWR≤1.2:1.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
7. For questions on technology, prices and delivery, please contact our sales offices or e-mail info@v-torch.com.