


# GPS Internal Passive Antenna

Part Number: VTGPSIP-10



## 1. Dimension (Unit: mm)

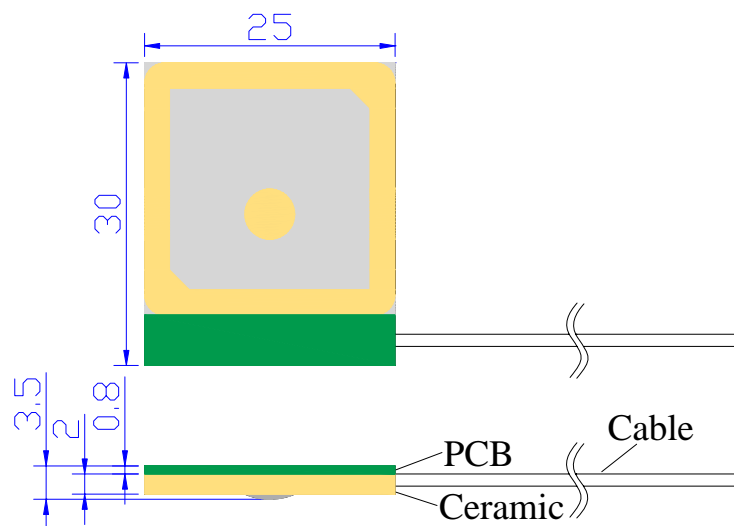

## 2. Electrical Characteristics

### 2.1 Dielectric Antenna

Form 1

| No. | Item                   | Specifications | Post Environmental Tolerance |
|-----|------------------------|----------------|------------------------------|
| 1   | Center Frequency (MHz) | 1575.42 MHz    | ±3 MHz                       |
| 2   | Band Width (MHz)       | ±5 MHz         | ±1 MHz                       |
| 3   | V.S.W.R (in BW )       | 1.5 : 1        | —                            |
| 4   | Gain (Zenith)          | 0 dB           | ±0.5 dB                      |
| 5   | Polarization           | RHCP           | —                            |

|   |           |      |   |
|---|-----------|------|---|
| 6 | Impedance | 50 Ω | — |
|---|-----------|------|---|

## 2.2 Mechanical

### Form 2

| No. | Item      | Specification    |
|-----|-----------|------------------|
| 1   | Cable     | RF1.13 or others |
| 2   | Connector | IPEX or others   |
| 3   | Mounting  | Internal         |

## 3 Reliability

Condition: Temperature: 40±5℃

Load: DC=5V±0.5 V

Quantity: 2000pcs

Sustained Time: 480h

## 4 Environmental Specifications

Post Environmental Tolerance (Refer to the form 1~2)

Condition: Temperature range 25±3℃

Relative Humidity range 55~75%RH

Operating Temperature range -40℃~+85℃

Storage Temperature range -40℃~+100℃

### 4.1 Moisture Proof

The device should satisfy the electrical characteristics specified in form 1~2 after exposed to the temperature 40±2℃ and the relative humidity 90~95% RH for 96 hours and 1~2 hours recovery time under normal condition.

### 4.2 Vibration Resist

The device should satisfy the electrical characteristics specified in form 1~2 after applied to the vibration of 10 to 55Hz with amplitude of 1.5mm for 2 hours each in X , Y and Z directions.

### 4.3 Drop Shock

The device should satisfy the electrical characteristics specified in form 1~2 after dropping onto the hard wooden board from the height of 30cm for 3 times each facet of the 3 dimensions of the device.

### 4.4 High Temperature Endurance

The device should satisfy the electrical characteristics specified in form 1~2 after exposed to temperature 80±5℃ for 24±2 hours and 1~2 hours recovery time under normal temperature.

### 4.5 Low Temperature Endurance

The device should also satisfy the electrical characteristics specified in form 1~2 after exposed to the temperature -40℃±5℃ for 24±2 hours and to 2 hours recovery time under normal temperature.

### 4.6 Temperature Cycle Test

The device should also satisfy the electrical characteristics specified in form 1~2 after exposed to the low temperature -25℃ and high temperature +85℃ for 30±2 min each by 5 cycles and 1 to 2 hours recovery time under normal temperature.