

SAW FILTER

Part Number: VTGC001


Features

SAW filter for Compass and GPS.

- 1 High stability and reliability with good performance and no adjustment.
- 2 Narrow and sharp pass band characteristics. RoHS compatible.
- 3 Low insertion loss and deep stop band attenuation for interference.
- 4 Low – loss SAW filter for Compass and GPS.
- 5 Package size 1.4*1.1

Package Dimensions


Ceramic Package: Unit: mm

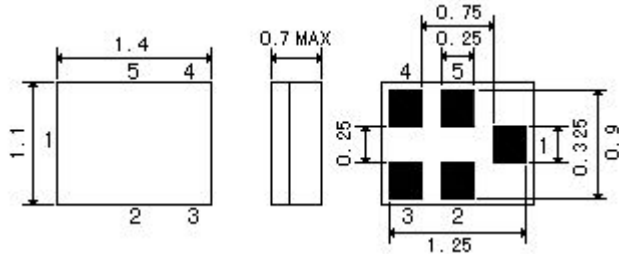

Pin Configuration

1	Input
4	Output
2,3,5	Ground

Marking



Top View, Laser Marking			
"G2":	Part number	"1":	Terminal 1
"*":	Lot number (The code shown below varies in a 4-year cycle)		

Code	1	2	3	4	5	6	7	8	9	10	11	12
2015	a	b	c	d	e	f	g	h	i	j	k	m
2016	n	p	q	r	s	t	u	v	w	x	y	z
2017	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z

Maximum Ratings

Rating		Value	Unit
DC Voltage (between any Terminals)	V_{DC}	10	V
RF Power (in BW)	P	10	dBm
Operating Temperature Range	T_A	-40 ~ +85	°C
Storage Temperature Range	T_{stg}	-40 ~ +85	°C


Electrical Characteristics:

Item		Minimum	Typical	Maximum	Unit
Center Frequency	f_c	-	1568	-	MHz
Insertion Loss in 1574.42–1576.42MHz	IL	-	1.4	1.6	dB
Insertion Loss in 1561–1576.42MHz	IL	-	1.6	1.8	dB
Amplitude Variation in 1574.42–1576.42MHz			0.1	0.5	dB
Amplitude Variation in 1561–1576.42MHz			0.3	0.7	dB
Absolute Attenuation	α				
0.30 ... 1468.0MHz		28	31	-	dB
1468.0 ... 1518.0 MHz		37	39	-	dB
1618.0 ... 1668.0MHz		35	37	-	dB
1668.0 ...2500.0 MHz		32	35	--	dB
2500.0 ...3000.0 MHz		38	43	--	dB
3000.0 ...4000.0 MHz		30	45	--	dB
4000.0 ...6000.0 MHz		25	30	--	dB
VSWR in 1574.42–1576.42MHz		-	1.1	1.5	
VSWR in 1561–1576.42MHz		-	1.5	1.8	

RoHS Compliant

Electrostatic Sensitive Device

**Typical Frequency Response
S21**

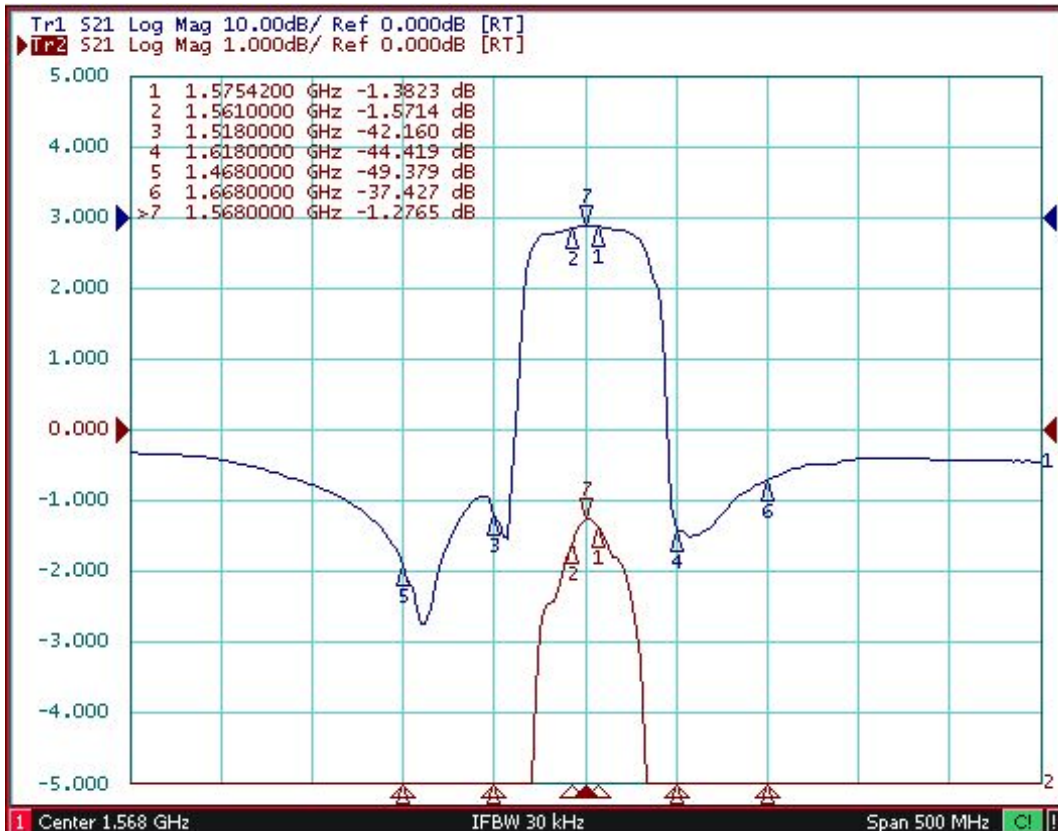

VSWR and Group Delay



Far Side



Stability Characteristics


	Test item	Condition of test
1	Mechanical shock	(a) Drops: 3 times on concrete floor (b) Height: 1.0 m
2	Vibration resistance	(a) Frequency of vibration: 10~55Hz (c) Directions: X,Y and Z (b) Amplitude: 1.5 mm (d) Duration: 2 hours
3	Moisture resistance	(a) Condition: 40°C ± 2°C , 93+2 -3% RH. (b) Duration: 96 hours (c) Wait 4 hours before measurement
4	Climatic sequence	(a) +70°C for 16 hours (c) -25°C for 2 hours (e) Wait 4 hours before measurement (b) +55°C for 24 hours, 90~95% R.H. (d) +40°C for 24 hours, 90~95% R.H.
5	High temperature exposure	(a) Temperature: 85°C (c) Wait 4 hours before measurement (b) Duration: 250 hours
6	Temperature cycling	(a) +85°C for 30 minutes ⇒ -40°C for 30 minutes repeated 120 times (b) Wait 4 hours before measurement

Requirements: The SAW filter shall remain within the electrical specifications after tests.


Remarks

- SAW devices should not be used in any type of fluid such as water, oil, organic solvent, etc.
- Be certain not to apply voltage exceeding the rated voltage of components.
- Do not operate outside the recommended operating temperature range of components.
- Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- Be careful of soldering temperature and duration of components when soldering.
- Do not place soldering iron on the body of components.
- Be careful not to subject the terminals or leads of components to excessive force.
- SAW devices are electrostatic sensitive. Please avoid static voltage during operation and storage.
- Ultrasonic cleaning shall be avoided. Ultrasonic vibration may cause destruction of components.

Test Circuit

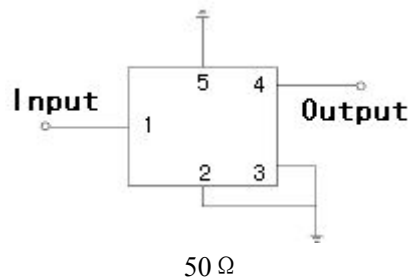

Recommended Soldering Profile

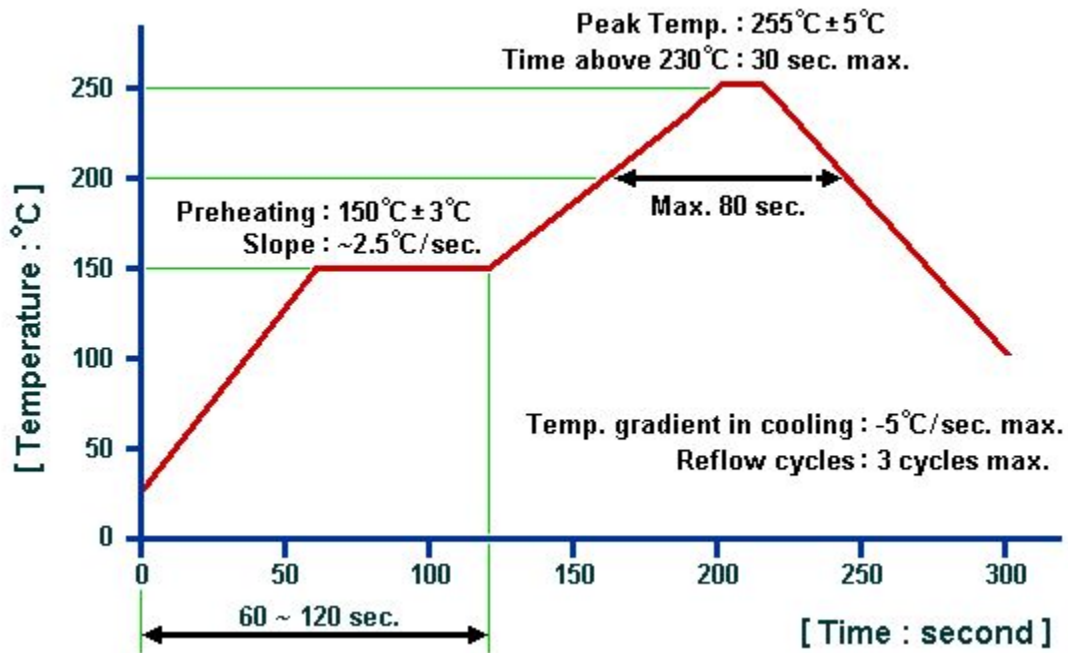

© V.TORCH 2014. All Rights Reserved.

NOTE:

1. The specifications of this device are subject to change or obsolescence without notice.
2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
4. For questions on technology, prices and delivery, please contact our sales offices or e-mail info@v-torch.com.