

PM Patch Cord

Description:

Optical fiber jumper is widely used in FTTH,WAN,and integrated routing field.V.TORCH is a professional Manufacturer engaged in passive optical components.We are committed to provide the excellent products to customers.




Features:

- 1.Match IEC61754,IEC61755&GR-1435-CORE
- 2.100% performance testing&excellent Geometry parameter of face and core loss
- 3.Low insertion loss and high return loss
- 4.ROHS compliant
- 5.Complete range

Application:

- 1.High density cable wiring system
- 2.High efficiency cable wing system
- 3.Connection of trunk lines
- 4.High integrated equipment and devices

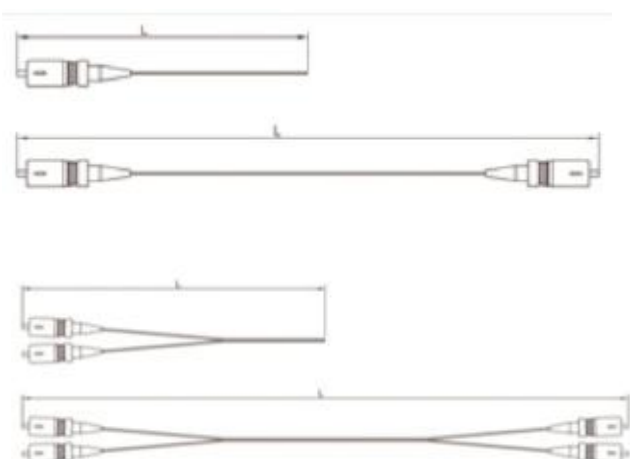

Parameter:

Name	Units	Values	
Operating Wavelength	nm	1550	
Connector Type	/	FC,SC	
surface	dB	UPC	APC
Insertion Loss	dB	Mini:0.2,Max:0.4	Mini:0.3,Max:0.5
Return loss	dB	≥50	≥60
ER		Mini:23,Typical:25	
FC Key Type	mm	R:Narrow1.97~2.02	N:Wide2.09~2.14
Optic Axis	/	Slow	Fast
Cable Size	mm	Φ3.0, Φ2.0, Φ0.9	

V.TORCH

Fiber Type	/	PANDA Fiber
Opera ting temperature	℃	-20～+70
Storage temperature	℃	-40～+85