


ROHS

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

TECHNICAL CHARACTERISTICS

Temp. range	-65~+165° C (PE Cable)
Vibration	MIL-STD-202, Method 213
Impedance	50 Ω
Frequency Range	DC~11GHz
Working Voltage	1000V max (有效值)
Withstand Voltage	2500V rms (海平面最小值)
Contact resistance	
Center Contact	≤ 1 mΩ
Outer Contact	≤ 1 mΩ
Insulation resistance	≥ 5000 MΩ
VSWR Straight	≤ 1.15
Right angle	≤ 1.25
Durability(mating)	≥500次 (cycles)

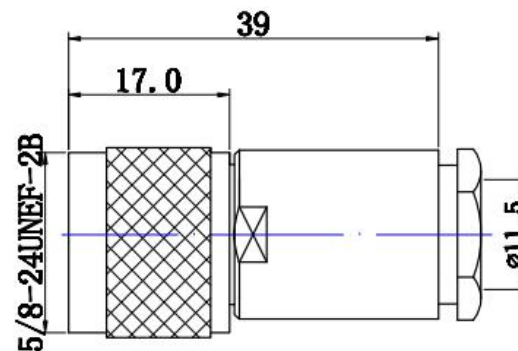

V. TORCH

V. TORCH			4	insulator		PTFE White	PCS	1	ROHS
			3	pressure pinpe		brass nickel plating	PCS	1	ROHS
			2	pin	brass	gold plating	PCS	1	ROHS
DRG No: VT-N1-01			1	Body	brass	nickel plating	PCS	1	ROHS
APPROVED BY	CHECKED BY	DESIDNED BY							
James sun 2012/06/18	Wangtian 2012/06/18	CaiChuang 2012/06/18	NO.	Part Number	Description	UNIT	Q'TY		