



ROHS

SIGN	DATE	DESCRIPTION	APPROVER

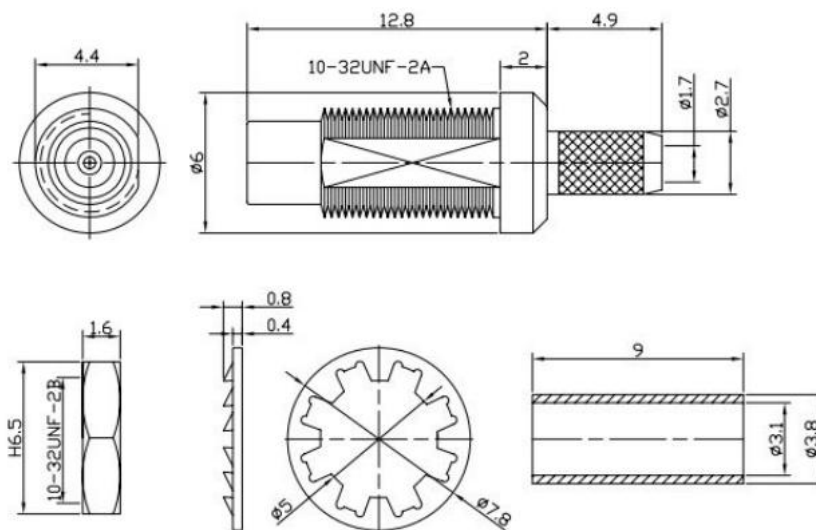

- MATERIAL
 - INSULATOR:TEFLON.
 - ASSEM.BODY:BRASS.
 - PIN:BRASS
 - FERRULE:BRASS.
 - WASHER:SPCC.
 - NUT:BRASS.
- FINISH
 - PIN :SEE TABLE.
 - BODY:SEE TABLE.
 - FERRULE:NI PLATED.
 - WASHER AND NUT: G/F PLATED.
- ELECTRICAL CHARACTERISTICS
 - WORKING VOLTAGE: AC 250V.
 - WITHSTAND VOLTAGE:750Vrms.
 - INSULATION RESISTANCE: 1,000M OHM MIN.
 - IMPEDENCE:50 OHM.
- ENVIRONMENTAL
 - WORKING TEMPERATURE: -55°C~+155°C.
 - RELATIVE HUMIDITY:MAX 95%(40°C±2°C)



RECOMMEND CUTTING DIM OF CABLE

V. TORCH

DRG No: VT-SMC1-1

APPROVED BY	CHECKED BY	DESIGNED BY
Zuo Fei 2012/06/18	An li hua 2012/06/18	Cai Chuang 2012/06/18

NO.	Part Number	Description	UNIT	Q'TY
			PCS	1
				ROHS